


Bussola di guida con collare spallata • Ringed enhanced lead bush

UNI ISO 8019

EBU-1SH

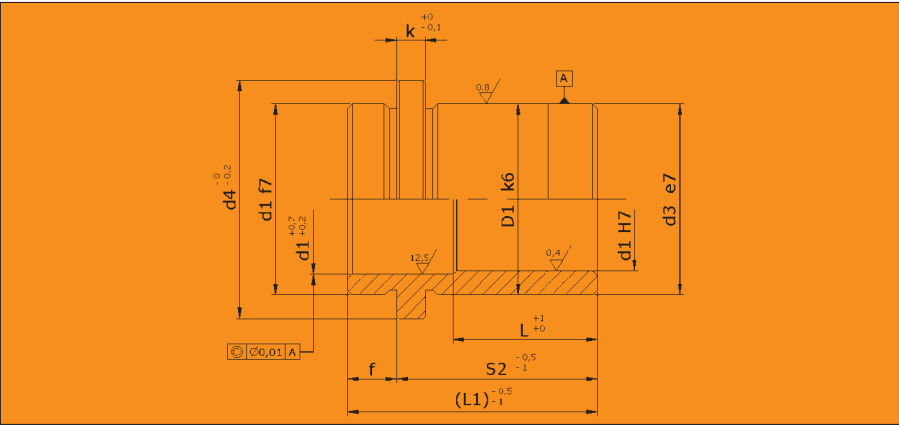

Acciaio: UNI 16 Ni Cr 4
Steel: UNI 16 Ni Cr 4

Durezza: HRC 60 - 62
Hardness: HRC 60 - 62

Esecuzione: Cementato, temperato, rettificato
Execution: Carburized, hardened, grinded

							ø	Ø
d ₃	d ₄	K	f	L	L ₁	S ₂	d ₁	d ₁
20	25	6	9	31	31	22	14	15
				36	36	27		
				45	45	36		
				55	55	46		
				56	65	56		
				56	75	66		
				56	85	76		
26	31	6	9	31	31	22	18	20
				36	36	27		
				45	45	36		
				55	55	46		
				65	65	56		
				75	75	66		
				76	85	76		
30	35	6	9	76	95	86	22	24
				76	105	96		
				31	31	22		
				36	36	27		
				45	45	36		
				55	55	46		
				65	65	56		
				75	75	66		
				85	85	76		
				95	95	86		
				105	105	96		
				96	125	116		

							ø	Ø
d ₃	d ₄	K	f	L	L ₁	S ₂	d ₁	d ₁
42	47	6	9	36	36	27	30	32
				45	45	36		
				55	55	46		
				65	65	56		
				75	75	66		
				85	85	76		
				95	95	86		
				105	105	96		
				125	125	116		
				116	145	136		
				116	165	156		
54	60	10	12	68	68	56	40	42
				78	78	66		
				88	88	76		
				95	95	86		
				108	108	96		
				128	128	116		
				136	148	136		
				136	168	156		
				136	208	196		

Esempio di ordinativo: d1 x S2

