


Espulsore a testa cilindrica temperato lamellare

Hardened flat ejector pin



EES - 2TL

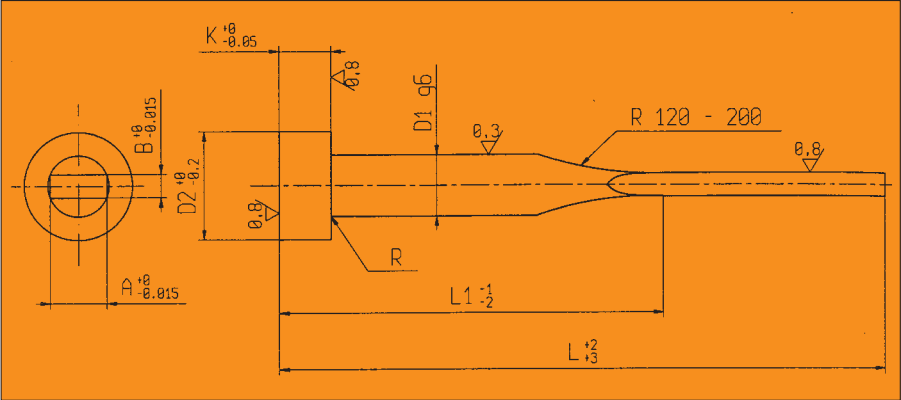

Acciaio: UNI 90 Mn V Cr 8 KU
(DIN 17350 - 90 Mn Cr V 8 - W Nr 1.2842)
Steel: UNI 90 Mn V Cr 8 KU
(DIN 17350 - 90 Mn Cr V 8 - W Nr 1.2842)

Durezza: Corpo 60 ± 2 HRC
Testa 45 ± 5 HRC
Hardness: Body 61 ± 2 HRC
Head 45 ± 5 HRC

Esecuzione: Rettificato
Execution: Grinded

D1	A	B	D2	K	L = Lunghezza/Length mm.															
					80		100		125		160		200		250		315		400	
					L1	40	L1	50	L1	60	L1	80	L1	100	L1	125	L1	160	L1	200
4	3,5	1	8	3	—		—		—											
4,2	3,8	1	8	3	—		—		—											
4,2	3,8	1,2	8	3	—		—		—		—									
5	4,5	1	10	3	—		—		—		—									
5	4,5	1,2	10	3	—		—		—		—									
5	4,5	1,5	10	3	—		—		—		—									
6	5,5	1	12	5	—		—		—		—									
6	5,5	1,2	12	5	—		—		—		—									
6	5,5	1,5	12	5			—		—		—									
6	5,5	2	12	5			—		—		—									
8	7,5	1,2	14	5			—		—		—									
8	7,5	1,5	14	5			—		—		—		—							
8	7,5	2	14	5			—		—		—		—		—					
10	9,5	1,5	16	5			—		—		—		—		—					
10	9,5	2	16	5			—		—		—		—		—					
12	11,5	2	18	7					—		—		—		—					
12	11,5	2,5	18	7					—		—		—		—					
16	15,5	2	22	7					—		—		—		—		—			
16	15,5	2,5	22	7					—		—		—		—		—			

Esempio di ordinativo: D1 x L x B